

BENEFICIOS PARA EL USUARIO FINAL

- Protege el tejido cuando está cerrado gracias a su sistema cofre.
- Instalación en exterior o interior utilizando los sistemas de guiado por cable o por varilla.

VENTAJAS PARA EL INSTALADOR

- Versatilidad de montaje con diferentes posibilidades de guiados, fijaciones y tensores.
- Cassette de aluminio en el soporte para mayor resistencia.
- Facilidad en la entrada del tubo de enrollado.

BENEFITS FOR THE END USER


- The cassette system of the Maxiscreenbox model protects the fabric when retracted.
- It is installed both outdoors and indoors using cable or rod guiding systems.

BENEFITS FOR THE PROFESSIONAL INSTALLERS

- Versatility of assembly with different possibilities of guiding systems, fixings and tensioners.
- Aluminium cassette on the bracket for added strength.
- Ease of entry of the rolling tube.



Dimensiones máximas | Maximum dimensions (m)

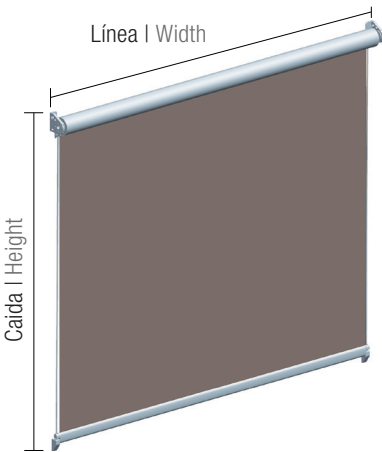

Línea Width	Caída Height
3,50	7,00
4,00	6,50
5,00	5,00



Uso | Use

- ☒ Exterior | Outdoors
- ☒ Interior | Indoors

Accionamiento | Operation

- ☒ Manual
- ☒ Motorizado | Motorised
- ☒ Automatizado | Automated

Recomendación: a partir de 3,60 m de caída utilizar siempre motor
Recommendation: always use a motor for height over 3,60 m

Sujeción | Mounting

- ☒ Frontal | Wall
- ☒ A techo | Ceiling
- ☒ Entre paredes | Between walls

Acabados | Finishes

Lacado según normativa QUALICOAT
Lacquer in accordance with QUALICOAT standards
Tornillería de acero inoxidable
Stainless steel screws and bolts

Sistema de guiado | Guiding system

Guía Cable | Cable guide
Guía Varilla | Rod guide

Instalaciones habituales | Usual installations

Exterior - Interior | Outdoors - Indoors

Ventanas y ventanales
Windows and Large windows



Cerramientos verticales
Vertical structures



Exterior | Outdoors

Balcones
Balconies





Clasificación | Classification

Normativa | Standards: UNE-EN 13561:2015



Viento | Wind
Hasta 38 km/h | Up to 38 km/h




Cotas | Dimensions (mm)

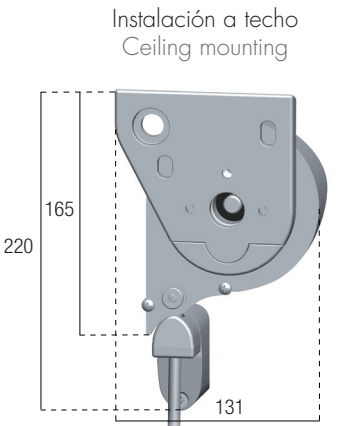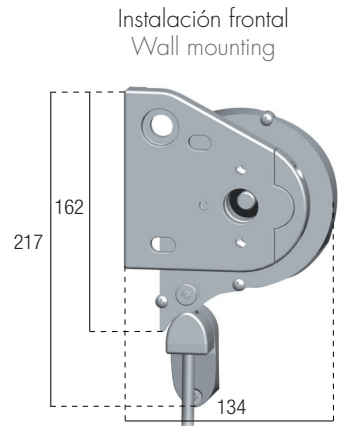


Soporte frontal/techo/entre paredes
Wall/ceiling/between walls support

Barra de carga
Drop bar

Montaje varilla/cable pared
Wall rod/cable mounting

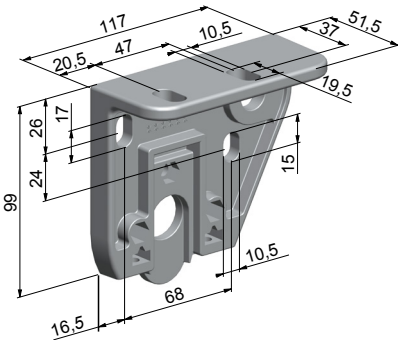

Montaje varilla/cable suelo
Floor rod/cable mounting



Selección tubo de enroll y Dimensiones máx. para tejidos recomendados
Roller tube selection and Maximum dimensions for recommended fabrics (m)

	Línea x caída Width x Height	T/E ø65 R/T ø65	T/E ø70 R/T ø70	T/E ø80 R/T ø80
RECSCREEN	RecScreen 4000P - 1%	3,50 x 7,00	4,00 x 6,00	5,00 x 3,50
	RecScreen 6000 - 2%	3,50 x 5,00	4,00 x 4,00	5,00 x 2,00
	RecScreen 7000 - 3%	3,50 x 7,00	4,00 x 6,00	5,00 x 3,50
	RecScreen 3500P - 5%	3,50 x 7,00	4,00 x 6,00	5,00 x 3,50
	RecScreen 5000P - 10%	3,50 x 6,00	4,00 x 5,00	5,00 x 3,00
	RecScreen DIAMANTE - 5%	3,50 x 7,00	4,00 x 6,00	5,00 x 3,50
	RecScreen CRISTAL - 6%	3,50 x 7,00	4,00 x 6,00	5,00 x 3,50
	RecScreen RUSTIC - 6%	3,50 x 5,00	4,00 x 4,00	5,00 x 2,50
	RecScreen BICOLOR- 6%	3,50 x 7,00	4,00 x 6,00	5,00 x 3,50
	RecScreen RAINLESS	3,50 x 6,00	4,00 x 5,00	5,00 x 2,50
RECACRIL	RECACRIL	3,50 x 3,00	4,00 x 2,50	5,00 x 1,50
	RECSYSTEM	3,50 x 3,00	4,00 x 2,50	5,00 x 1,50
	RECWATER	3,50 x 2,25	4,00 x 2,00	5,00 x 1,20
PVC	RECAFLEX PRO	3,50 x 5,00	4,00 x 4,00	5,00 x 3,00

NOTA: Para otras dimensiones consultar Manual del Fabricante.
NOTE: For other dimensions, consult the manufacturer's manual.

(solo interior | only indoors)

(solo interior | only indoors)

(solo interior | only indoors)

(solo exterior sin vidrio | only outdoors without glass)

(solo exterior sin vidrio | only outdoors without glass)

(solo exterior sin vidrio | only outdoors without glass)

(solo exterior sin vidrio | only outdoors without glass)

(solo exterior sin vidrio | only outdoors without glass)

NOTA: Línea mínima = 0,80 m (Motor) / 0,25 m (Manual)
NOTE: Minimum width = 0,80 m (Motor) / 0,25 m (Manual)

